FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

3028EN and 3036EN Tractor (India Edition)



HYDRAULIC

OIL FILTER – SJ28834

Replace after every 100 hours and change every 250 hours and every 1250 hours.

(Click here for **capacity**)



HYDRAULIC

FUEL FILTER – MIU801267

Replace every 500 hours.

(Click here for **capacity**)



ENGINE

OIL FILTER – M806419

Replace after Initial 100 Hours and every 250 hours.

(Click here for **capacity**)






ENGINE

SECONDARY FUEL FILTER – M811032

Replace after every 50 hours and every 500 hours or annually, whichever occurs first.

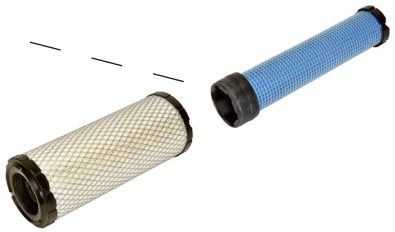

ENGINE

PRIMARY AIR FILTER – SJ16911

SECONDARY AIR FILTER – SJ16914

Change after every 1000 hours or replace as required.

JOHN DEERE

Genuine Parts and Service

March 2021. Subject to change without notice.

https://www.deere.com/en_US/parts/parts_by_industry/ag/fmi/filter_maintenance_information.page

CAPACITIES
3028EN and 3036EN Tractor (India Edition)

CAPACITIES (Approximate):

Fuel Tank:

..... 32 L (7.03 gal)

Crankcase including Filter Change:
Plus-50™ II

3028EN..... 3.6 L (0.79 gal)
3036EN..... 3.9 L (0.85 gal)

Cooling System:
Cool-Gard™ II

..... 7 L (1.5 gal)

Transmission and Hydraulic System:
Hy-Gard™

..... 31 L (6.8 gal)

Front Axle:

..... 3.3 L (0.72 gal)

Return to Filter Overview

JOHN DEERE
Genuine Parts and Service